
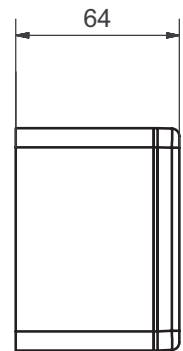
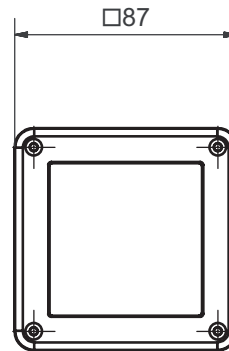


## 82410 E-reader RFID remote

Surface-mounted/flush-mounted for outdoors



### Product profile

RFID reader for outdoor use.

The reader are available as Feller (IP-55) design.

### Standard version

- Identification via RFID Mifare DESfire EV 1 (ISO 14443A)
- Glutz Wireless Access communication (868 MHz) or RS485 bus
- Feller Design
- Surface-mounted/flush-mounted 1-piece
- Dimensions 87 x 87 mm
- Mains operation (12-24VDC), power consumption: max. 150mA at 12V, 75mA at 24V
- 2 relay changeover contacts, potential-free, 0-30 V max. 1 A
- 2 inputs, galvanically isolated, 5-27 V DC

### Scope of supply

- E-reader
- Quick guide

### Important note

E-reader only operated with regulated direct current!

82410 · ① · ② · ③ · ④

① Power supply	② AP-housing	③ UP Frame	④ Front
<b>11 External, bus</b>	<b>10</b> Black IP55	<b>00</b> No UP Frame	<b>10</b> Black IP55
	<b>11</b> White IP55	<b>10</b> Black IP55	<b>11</b> White IP55
	<b>00</b> No AP-Housing	<b>11</b> White IP55	