
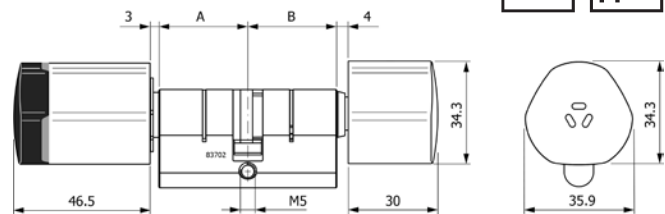


## 83702 E cylinder

EM / PZ

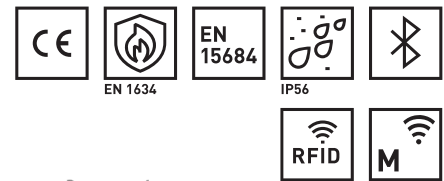

### Product profile

Battery-powered electronic cylinder for internal and external doors. Opening and closing from both sides is done by contactless reading of the RFID medium or by the smartphone app and subsequent turning of the knob.

### Standard version

- Exterior E-knob with access control function and battery
- Interior with mechanical thumbturn
- Identification via RFID Mifare DESfire EV1/2 (ISO 14443A)
- Programming via media, wireless access (868 MHz)
- Protection classes: IP56, EN 15684, RC2
- Fire protection EN 1634-2: 90 min
- BLE-ready

- High exterior drill protection (PT1), up to RC4 (with corresponding door plate)
- Low temperature (LT) for operation below 0°C
- Shortened rib side A by 8mm (ST8), for protection fittings with plug-pulling protection

### Scope of supply

- 1 E cylinder
- 1 battery
- 1 retaining screw M5x75
- 1 Quick Guide

### Important note

- PT1 (drill protection) version only applicable for the external side

### Options

83702 · ① · ② · ③ · ④ · ⑤ · ⑥ · ⑦ · ⑧

① eAccess_Length A (External) II	② eAccess_Length B (Internal) II	③ eAccess_Operating conditions	④ Security	⑤ Turn type	⑥ Version	⑦ eAccess_Finish	⑧ eAccess_ Antenna colour
<b>30,0 mm (Standard length)</b>	<b>20,0 mm</b>	<b>0 Standard</b>	<b>0 Standard</b>	<b>1 Glutz knob</b>	<b>S Standard</b>	<b>0 Matt nickel</b>	<b>0 Black</b>
35,0 mm	25,0 mm	1 Low temperature (LT)	2 PT1	0 Blind	M Cog 10	2 Polished chrome	1 White
40,0 mm	30,0 mm		4 ST8			3 Matt chrome	
45,0 mm	35,0 mm					5 Black	
50,0 mm	40,0 mm					7 Bronze effect	
55,0 mm	45,0 mm						
60,0 mm	50,0 mm						
65,0 mm	55,0 mm						
70,0 mm	60,0 mm						
75,0 mm	65,0 mm						
... ..	70,0 mm						
160,0 mm	75,0 mm						
	... ..						
	160,0 mm						

Lengths: Refer to the length matrix for available combinations.

Total length: min. 50mm, max. 220mm

Technical changes reserved 0823