

DS-2CD2332-I 3MP EXIR Turret Network Camera




EXIR



Key features

- 3 megapixel (2048 x 1536) resolution
- Full HD1080p real-time video
- DWDR & 3D DNR & BLC
- EXIR illuminator (up to 30m)
- IP66
- PoE

Dimensions

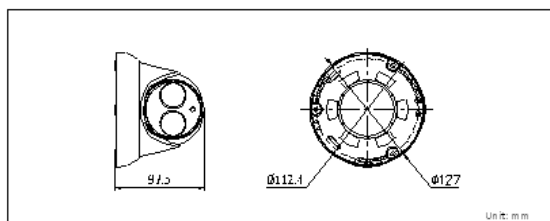

Accessories



DS-1239ZJ-1

Wall Mount
Aluminium Bracket
(with junction box)

DS-2CD2332-I	
Camera	
Image sensor	1/3" progressive scan CMOS
Min. illumination	0.07 lux@F1.2, AGC on 0 lux with IR
Shutter time	1/25s (1/30s) ~ 1/100,000s
Lens	4mm@F2.0, angle of view: 75.8° (2.8mm, 6mm, 8mm, 12mm optional)
Lens mount	M12
Angle adjustment	Pan: 0° ~ 360°, tilt: 0° ~ 75°, rotation: 0° ~ 360°
Day & night	ICR
Digital noise reduction	3D DNR
Wide dynamic range	Digital WDR
Backlight compensation	Yes, zone configurable
Compression standard	
Video compression	H.264 / MJPEG
H.264 compression profile	Main profile
Bit rate	32 Kbps ~ 16 Mbps
Dual stream	Yes
Image	
Max. image resolution	2048 x 1536
Frame rate	50Hz: 12.5fps (2048 x 1536), 25fps (1920 x 1080), 25fps (1280 x 720) 60Hz: 15fps (2048 x 1536), 30fps (1920 x 1080), 30fps (1280 x 720)
Image settings	Saturation, brightness, contrast adjustable through client software or web browser
Network	
Network storage	NAS
Alarm trigger	Motion detection, dynamic analysis, tampering alarm
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour (SIP optional)
System compatibility	ONVIF, PSIA, CGI
General functionalities	User authentication, watermark
Interface	
Communication interface	1 RJ45 10M / 100M Ethernet port
General	
Operating conditions	-30°C ~ 60°C (-22°F ~ 140°F) humidity 95% or less (non-condensing)
Power supply	12 VDC ± 10%, PoE (802.3af)
Power consumption	Max. 5.5W (7.5W with ICR on)
Ingress protection	IP66
EXIR range	up to 30m
Dimensions	Φ 127 x 97.5 mm
Weight	670g (1.5 lbs)

Available models

DS-2CD2332-I

* Product picture and technical specs subject to change without previous notice.
For further information, please contact our local sales representatives.