

**DS-2DP1636-D****PanoVu series 360°Panoramic Camera**

Hikvision PanoVu series DS-2DP1636-D panoramic cameras are able to capture high quality 3D real-time panoramic images and support 3D operation. Users can select any monitoring angle by click the mouse, and adjust the monitoring angle by rotation, zoom in and zoom out.

With its various characteristics, PanoVu series cameras can be widely used in airports, stations, gymnasiums, scenic pots, and squares which need a wide range of monitoring.

- 1/1.9" Progressive Scan CMOS
- 360° view angle
- Up to 2 × 2400 × 3840@25fps
- Ultra-low illumination
- 3D Operation
- 36VDC power supply
- IP66



## Function Description

### Panoramic Camera

- Eight 1/1.9" Progressive Scan CMOS, up to  $2 \times 2400 \times 3840 @ 25\text{fps}$
- Horizontal angle of view:  $360^\circ$ , Vertical angle of view:  $180^\circ$
- Min. Illumination: 0.004Lux@(F1.8,AGC ON)(Color), 0.0004Lux@(F1.8,AGC ON)(B/W)


### System function

- Support selecting any monitoring angle by clicking the mouse, and adjust the monitoring angle by rotation, zoom in and zoom out.
- Support quick operate in browser.
- Support HLC, BLC, 3D DNR.
- Support onboard storage, up to 128GB.
- 7 alarm input and 2 alarm output, 1 audio input and 1 audio output.
- Optional fiber cable and RJ-45 cable.
- Support IP66 standard.

## Specifications

| <b>Panoramic Camera</b>       |  |
|-------------------------------|--|
| Image Sensor                  | 1/1.9" Progressive Scan CMOS   |
| Max. Image Resolution         | 2 × 2400 × 3840@25fps  |
| Min. Illumination             | Color: 0.004Lux @ (F1.8, AGC ON), B/W: 0.0004Lux @ (F1.8, AGC ON)  |
| Lens                          | f4.0mm/ F1.8   |
| Angle of View                 | Horizontal angle of view: 360° , Vertical angle of view: 180°  |
| 3D Operation                  | Support  |
| Audio Exception Detection     | Support  |
| Main Stream                   | 50Hz: 25fps 2×(2400×3840, 1792×2880, 1600×2560, 1200×1920)<br>60Hz: 25fps 2×(2400×3840, 1792×2880, 1600×2560, 1200×1920) |
| Sub Stream                    | 50Hz: 25fps 2×(320×512, 480×720)<br>60Hz: 25fps 2×(320×512, 480×720)   |
| Third Stream                  | 50Hz: 25fps 2×(2400×3840, 1200×1920)<br>60Hz: 25fps 2×(2400×3840, 1200×1920)   |
| Image Compression             | H.264(Baseline, Main, High Profile)/MJPEG  |
| Others                        | BLC, HLC, 3D DNR   |
| <b>Network</b>                |  |
| Audio compression             | G.711ulaw/G.711alaw/G.722/G.726/MP2L2/PCM  |
| Protocols                     | IPv4/IPv6,HTTP,HTTPS,802.1x,QoS,FTP,SMTP,UPnP,SNMP,DNS,DDNS,NTP,RTSP,RTP,TCP,UDP,IGMP,ICMP,DHCP,PPPoE                    |
| Application programming       | Open-ended API, ONVIF, ISAPI, PSIA   |
| <b>System Integration</b>     |  |
| Menu                          | English  |
| Scheduled Task                | Support  |
| Alarm I/O                     | 7 alarm inputs (0-5v DC), 2 alarm output, Support alarm linkage  |
| Alarm Action                  | Preset / Patrol / Pattern / SD card recording/ Aux output/ E-map on Client/ Send Email/ Upload to FTP                    |
| Audio I/O                     | 1/1  |
| Fiber Cable                   | 1 10M/100M/1000M FC interface, TX1310 / RX1550nm wavelength, 20 km transmission distance                                 |
| Ethernet                      | 1 RJ45 100M/1000M Ethernet interface   |
| RS485                         | Half duplex, HIKVISION, Pelco-P, Pelco-D, self-adaptive  |
| Onboard Storage               | Built-in Micro SD/SDHC /SDXC card slot, up to 128GB, manual/alarm recording  |
| <b>General</b>                |  |
| Power                         | DC 36V, MAX. 110W (Heater: 44W)  |
| Working Temperature/ Humidity | -40 °C – 65 °C, Humidity 90% or less   |
| Protection Level              | IP66 standard, TVS 6,000V lightning protection, surge protection and voltage transient protection                        |
| Dimensions(mm)                | Φ 274.9 × 250.3  |
| Weight                        | 4.5kg  |
| Mount Option                  | Wall mount: DS-1603ZJ; Long-arm Pendant mount: DS-1668ZJ (20); Pendant Mount: DS-1668ZJ                                  |

## Dimensions

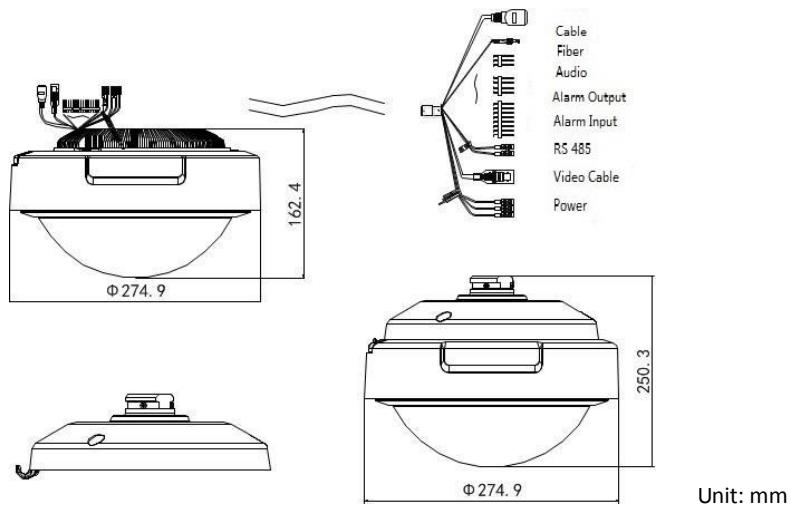

Unit: mm

## Accessories



DS-1603ZJ

Wall Mounting Bracket



DS-1668ZJ

Pendant Mounting Bracket



DS-1668ZJ (20)

Long-arm Pendant Mounting Bracket



DS-1619ZJ

Gooseneck Mounting Bracket

Distributed by

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

Hikvision Poland  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision USA**

T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision India**

T +91-22-28469900  
sales@pramahikvision.com

**Hikvision UK**

T +44-1628-9021-4  
support.uk@hikvision.com

**Hikvision Europe**

T +31-23-5542770  
saleseuro@hikvision.com

**Hikvision Italy**

T +39-0438-6902  
info.it@hikvision.com

**Hikvision Singapore**

T +65-6684-4718  
sg@hikvision.

0503151070309

**Hikvision Middle East**

T +971-4-8816086  
salesme@hikvision.com

**Hikvision France**

T +33(0)1-85-330-444  
info.fr@hikvision.com

**Hikvision Oceania**

T +61-2-8599-4233  
hikvision.com

**Hikvision Russia**

T +7-495-669-67-99  
salerau@hikvision.com

**Hikvision Spain**

T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Hong Kong**

T +852-2151-1761