




## 82630 I/O extender 8R8I

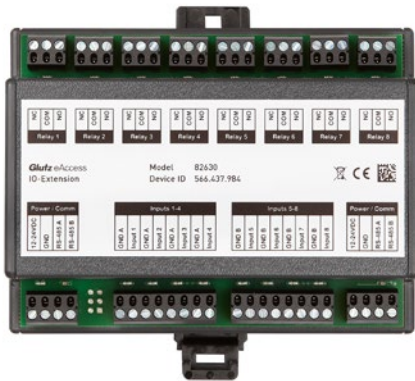

### Product profile

- Activation for selective control units, mailboxes, compartment systems or lifts
- Cascading of up to 5x I/O extenders
- 8x relay outputs (potential-free)
- 8x inputs (not potential-free)
- An RS-485 bus connection to an E-reader or an I/O module is required for activation.

### Standard version

- Top-hat rail housing, including mount for DIN rails
- RS485 Bus
- Mains operation (12-24VDC), power consumption: max. 350mA at 12V, max. 220mA at 24V, 3.6 W in standby
- 8 relay changeover contacts, potential-free, 0-30 V max. 1 A
- 8 inputs, not galvanically isolated
- Dimensions (WxHxD): 113 x 85 x 30mm (without mount)

### Scope of supply

- I/O-Extender